button switch. It allows the headlight to be a large rocker-style switch. The instructions f you are modifying the stock wiring, the same

30 S

ind disconnect the

ally it should be close Securely mount it, not need to be

on switch and route terminal on the relay. from the #56

cuit breaker in all sufficient for most light use a minimum of o the momentary

thorn switch) in the momentary switch to nen the switch button grounded, and when unded.

al on the headlight to

erminal on the ay.


indicator light.

is grounded.

e lights position.
nentary switch and
the headlight
g" sound as the relay
versa.

e sure all

#30 – 12 Volts supply #56 – From light switch (#30 and 56 can be common with a jumper wire) S- Momentary contact switch such as a horn switch, etc. 56A – High beam in head light 56B – Low beam in head light

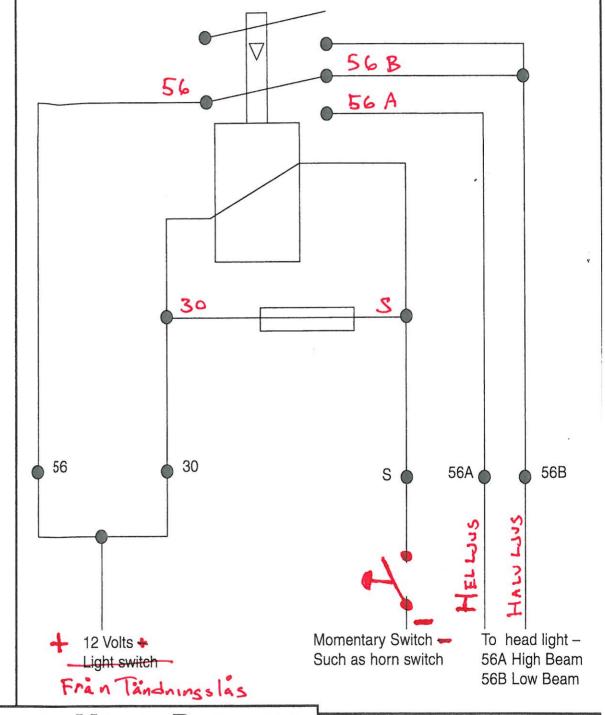

STANDARD MOTOR PRODUCTS

Framlampa Jordas Separat.

Vid frager. Kontakta Jörgen / Bikeline